


Bangkirai Oil



treatex[®]

Treatex Bangkirai Oil is an exterior wood finish which provides long term protection from UV rays and weather damage. This product is manufactured on a base of natural sustainable raw materials: sunflower oil, soybean oil and rapeseed oil. Treatex Bangkirai Oil is designed for use on timbers like bangkirai, yellow balau, karri, massaranduba, iroko, and ipe. It is not suitable for timbers which contain tannins, such as oak. Treatex Bangkirai Oil is very hard wearing, which makes it the ideal finish for decking, garden furniture and other exterior joinery.

- Easy to apply
- UV resistant
- Highly water resistant
- Contains no biocides or toxic ingredients
- Safe for use on children's toys
- Suitable for indoor and outdoor use
- Will not flake or peel

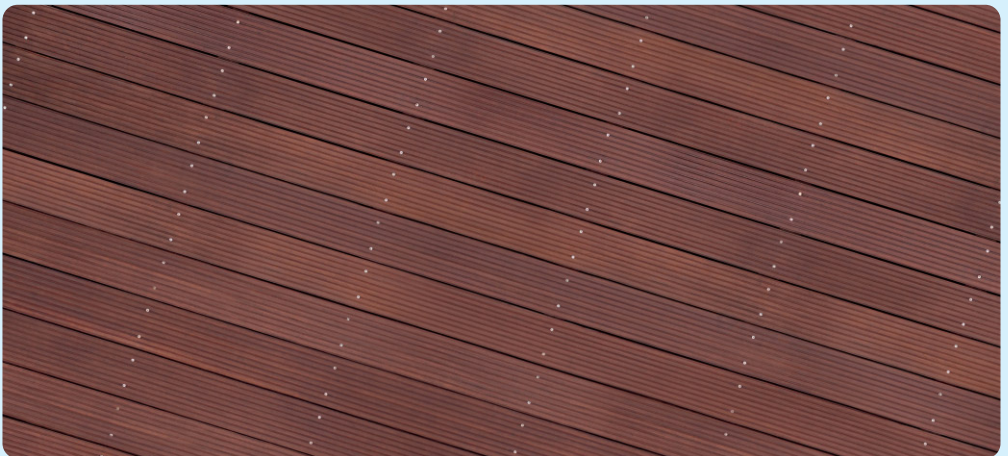



Preparation

Whilst Treatex Bangkirai Oil can be applied over most previous finishes it works much better on unfinished timber. When overcoating a previously finished surface, a trial application is essential. If a previous finish is to be overcoated then it should be lightly sanded. Flaking or peeling finishes must be fully removed prior to application. Ensure the timber is dry and free from possible contaminants e.g. algae, grease, dirt, dust, etc. We advise that when using Treatex Bangkirai Oil, sufficient product is purchased to complete the whole project and when more than one tin is required it is advisable to mix them together before use. Timber must have a moisture content below 18%. Temperature must be greater than 8°C during application and drying. We strongly recommend a trial application prior to starting the project.

Application of Treatex Bangkirai Oil

Stir tins thoroughly, before and during use. Use a brush or roller to evenly apply Treatex Bangkirai Oil allowing approximately 50ml per m². Pay particular attention to end grain, on end grain apply wet on wet until product is no longer absorbed by the timber. After approximately 12 hours the first coat can be overcoated. Apply with a brush or roller a second coat of Treatex Bangkirai Oil, again allowing roughly 50ml per m². After the second coat leave for approximately 12 hours to dry.

Tips

Treatex brushes and rollers are available. Wet brushes and rollers can be cleaned with Treatex Thinner or white spirit. Store tins in a cool and frost free environment. Unopened tins will last for five years. Once tins are opened, transfer contents to a smaller airtight container.

Coverage

2.5 litres covers approximately 50m² one coat depending on timber and method of application.

Contact

Treatex Ltd, Unit 1,
Howland Road Business Park,
Howland Road, Thame,
Oxfordshire, OX9 3GQ.
tel: 01844 260416
fax: 01844 358160
email: info@treatex.co.uk
www.treatex.co.uk